





# Access to reliable di

### **Reliable** and accurate diagnosis

Nihon Kohden's ECAPS12C ECG analysis program has over 200 findings and 5 judgment categories with detailed analysis. ECAPS12C can also detect Brugada-type ECG pattern.

ECG-2250 satisfies the IEC60601-2-51 standard for high accuracy signal processing, AC filtering, ECG measurement and ECG analysis. Noise is eliminated with less waveform distortion.

More accurate information supports faster diagnosis.

# **Reliable** monitoring

The 7-inch backlit color LCD displays all 12-lead ECG waveforms and patient information on one screen clearly.

A lead detached message helps avoid re-testing, while the Help function shows which electrode is detached.

You can also preview the ECG waveforms and analysis result before recording.


#### **Reliable** patient data management

The alphanumeric keyboard provides convenient data entry. You can also use a fast, error-free barcode reader or magnetic card reader.

Up to 400 ECG files can be saved in the internal memory. Approximately 3,000 ECG files can be saved on one SD memory card.

# **Reliable** data transfer

ECG data can be sent to a PC by SD memory card, wired or wireless LAN.





USB Wi-Fi adapter






# agnosis



#### **Recording Examples**

ID:123 Sex:M	Name: Nihon Kohden Birth date: 15-Jun-1990	Medicat 25 years 183 cm		23-Jun-2015 F 114/65 mmHg	2M1:20 60 bpm	I D: 123 23-Jun-2015 Pl Name: Nihon Kohden	
5 mm/mV 25 mm/s	Filter: H50 d 35 Hz	5 mm/mV				Sex:M Birth date:15-Jun-1990 183 cm 73 kg 114/65 mmHg Medication:	
<u>_</u>	Indr-	<u>_</u>	1			Vant.rate 00 bpm   PR int 180 ms   QR5 daw 84 ms   QTV0Tc(ED int 400/ 30/ 20 *   PX0FS/T axis 40/ 30/ 20 *   RV5/SV1 amp 1.5/7 1.56 mV   RV5/SV1 amp 3.23 mV   1100 Sinus rhythm 1570 with occasional ventricular premature complexe   9140 ** abnormal rhythm ECG **	
"	un un h						
111	<u>_</u>				, ,		
aVR	7		-in-		j_Л		
avi.							
aVF				_h_h		Unconfirmed Report Reviewed by:	
2500 001101 04-							

12-lead ECG 6 traces, analysis results

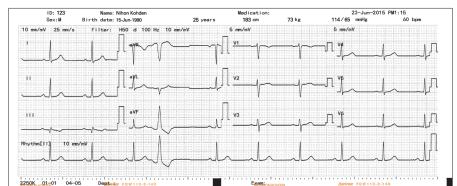

12-lead ECG 3 traces, 1 channel rhythm recording



3 channel rhythm recording

#### **Specifications**

Dimensions	285 W × 102 H × 298 D mm		
Weight	2.3 kg (without battery and recording paper)		
Battery operation time	60 minutes		
Display	7-inch color TFT LCD		
Number of recording channel	3, 4, 6		
Paper speed	5, 10, 12.5, 25, 50 mm/s		
Recording paper	110 mm width		
Safety and performance standards	IEC 60601-1: 2012, IEC60601-2-25: 2011		

#### **Major Options**

- Cart, KD-105D/E
- Patient cable hanger, KH-100D
- SD memory card, QM-001D Y154D
- ECG Viewer software

Wi-Fi is a trademark of the Wi-Fi Alliance.

SD is a trademark of SD-3C, LLC.

This brochure may be revised or replaced by Nihon Kohden at any time without notice.



NIHON KOHDEN CORPORATION 1-31-4 Nishiochiai, Shinjuku-ku, Tokyo 161-8560, Japan Phone +81 (3) 5996-8036 Fax +81 (3) 5996-8100 www.nihonkohden.com

25